

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representation of  
The original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

# (12) UK Patent Application (19) GB (11) 2 342 264 (13) A

(43) Date of A Publication 05.04.2000

(21) Application No 9918002.8

(22) Date of Filing 30.07.1999

(30) Priority Data

(31) 9816953

(32) 04.08.1998

(33) GB

(71) Applicant(s)

Nor.Web DPL Limited  
(Incorporated in the United Kingdom)  
Regus Building, 268 Bath Road, SLOUGH, SL14DX,  
United Kingdom

(72) Inventor(s)

Paul A Brown

(74) Agent and/or Address for Service

Mewburn Ellis  
York House, 23 Kingsway, LONDON, WC2B 6HP,  
United Kingdom

(51) INT CL<sup>7</sup>

H04B 3/54, H01B 9/00, H04B 3/56

(52) UK CL (Edition R )

H4R RTSU R10A1

H1A AF

(56) Documents Cited

GB 2088175 A

EP 0889602 A

EP 0178804 A

EP 0141673 A

US 4016429 A

(58) Field of Search

UK CL (Edition R ) H4R RTC RTR RTSR RTSU RTT

INT CL<sup>7</sup> H04B 3/54 3/56

online: EPODOC,WPI,JAPIO

(54) Abstract Title

**Signal transmission over power networks**

(57) An electricity distribution and/or power transmission network includes means for the input and output of a telecommunications signal onto or from an earth or neutral conductor of the network. The neutral or earth conductor is substantially isolated from the electrical earth e.g. by a suitable inductor at frequencies used by the telecommunication signals. Preferably, the network includes a transformer 20 for connecting first and second portions of the network and includes bypass means 30 for removing the signal from the conductor in the first portion of the network and inputting the signal onto any conductor of the second portion of the network. A power cable (fig.1 not shown) may include an inner core of twisted aluminium conductors insulated by a sheath of XLPE material from a further sheath of the neutral earth conductors (e.g. of copper).

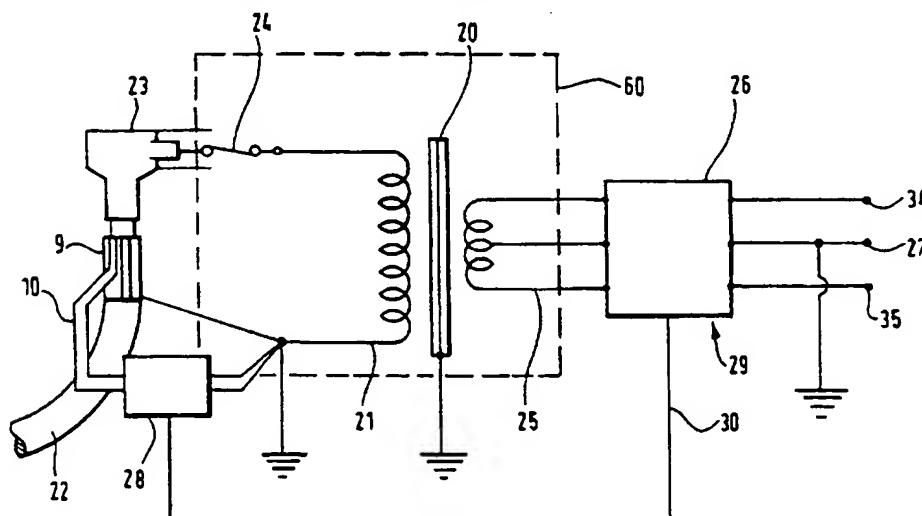


Fig.2.

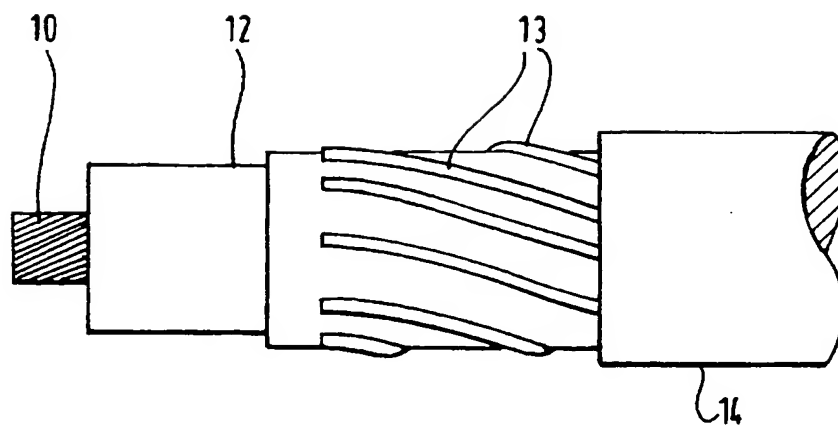


Fig.1A.

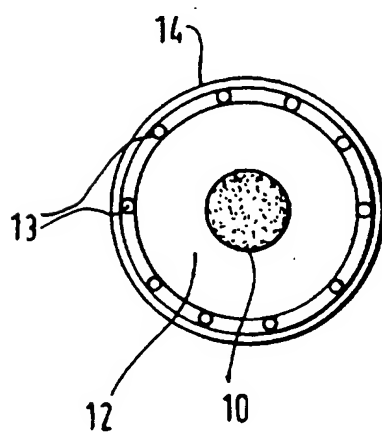


Fig.1B.

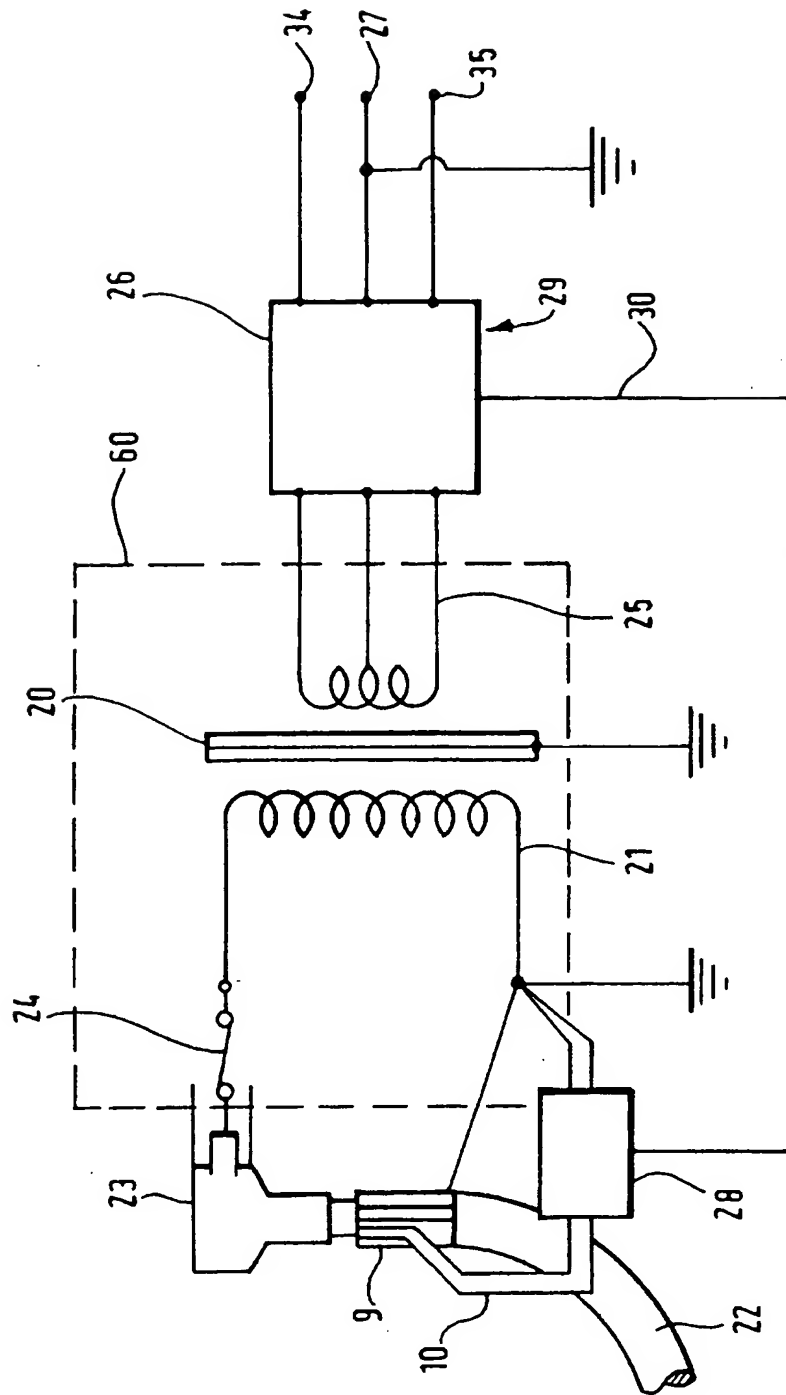


Fig. 2.

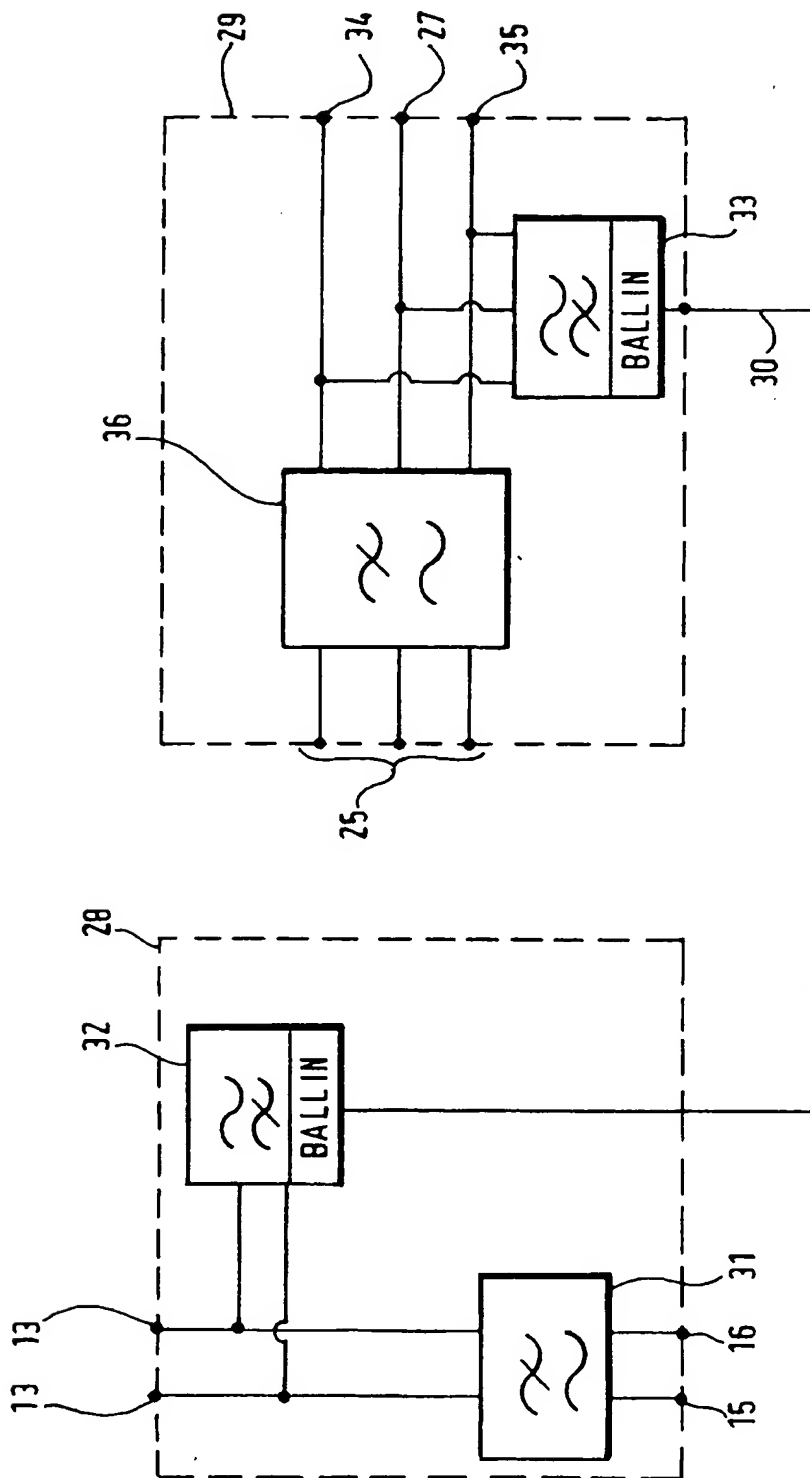


Fig.3.

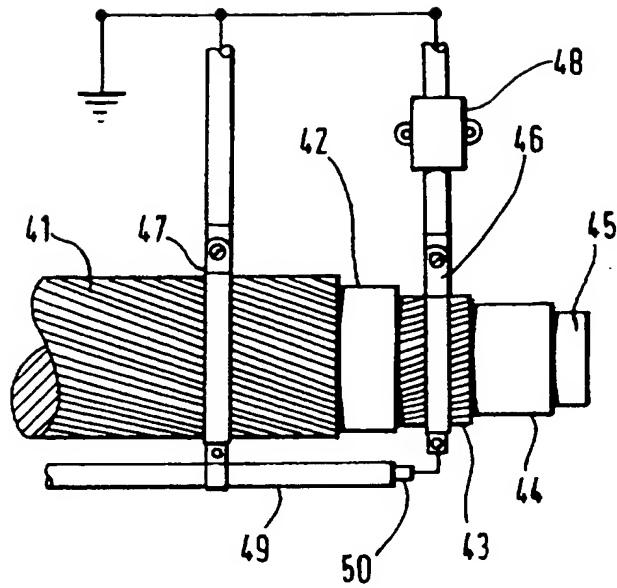


Fig.4A.




Fig.4B.

POWER NETWORKS

This invention relates to a method of signal injection, transmission, interconnection (termination) and detection, and to a power transmission network, ie. a mains electricity distribution and/or transmission network. In particular it relates to the use of mains electricity networks and/or lines for telecommunications transmission (e.g. voice, data, image and/or video).

10

In the UK, it is conventional to describe a power network for 33kV and above as a "transmission network", and one for less than 33kV as a "distribution network". In this specification the term "electricity distribution and/or power transmission network" (EDN) is normally used, but general references to power networks and to transmission of signals are to be construed as applying to all such networks.

20 Traditionally telecommunications signals have been transmitted on independent networks e.g. telephone lines. More recently, in order to simplify and increase efficiency of telecommunications services to domestic or industrial premises, there have been investigations into using existing electricity transmission and distribution networks to carry telecommunications services.

In particular, transmission of telecommunications signals on such networks is described in the applicant's prior PCT applications, published as WO94/09572, WO95/29536, WO95/29537, WO96/07245, WO98/19318, the disclosures of which are incorporated herein by reference.

The present invention aims to provide a method and apparatus for telecommunications transmission on a power

35

network which allows for easier/safer connection to the power network.

Accordingly, in a first aspect, the present invention  
5 provides an electricity distribution and/or power transmission network, the network including input means for the input of a telecommunications signal onto an earth or neutral conductor of the network and output means for removing said telecommunications signal from the network.

10 This provides a means of efficiently and cost-effectively interconnecting power line telecommunication (PLT) signals to the power line by using a (usually) non-current carrying conductor. It also allows connection between  
15 different voltage levels on an electricity distribution network (EDN) as explained below. For example, between the secondary (low voltage 120-0-120 volt) and primary networks (high voltage 7.2 kV) of a North American EDN.

20 By contrast, if the telecommunications signals were on one of the phase conductors, a transformer by-pass technique would require the provision of a robust signal path for the PLT signals which are required to by-pass the low and high voltage windings of a typical distribution  
25 transformer. In particular, the relatively high voltage (eg. 7.2 kV) interconnections would require the use of expensive, high quality, high voltage capacitors together with high voltage fuse links and the practical designs usually require the use of high voltage resins in their  
30 fabrication.

Preferably, the invention provides a much simpler and more cost effective solution for interconnecting PLT signals where at least the primary, or high voltage, EDN utilises  
35 power cables with a neutral/earth sheath of conductors each having separation from the other. As a result the



neutral/earth sheath might preferably be utilised to carry PLT signals and 60 Hz neutral and/or earth currents without any mutual impairments.

- 5 Preferably the neutral or earth conductor is substantially isolated from the electrical earth at frequencies to be used by the telecommunications signal. The high frequency isolation may be achieved by a suitable inductor being electrically connected between the conductor and  
10 electrical earth, and the inductor may consist of a ferrite or ferromagnetic sleeve located substantially around a part of the conductor. Preferably, the inductor can conduct at least a 10A current.
- 15 Preferably, the network includes a transformer for connecting first and second portions of the network, and includes bypass means for removing the signal from the conductor in the first portion of the network and inputting the signal onto any conductor (phase, earth or  
20 neutral) of the second portion of the network.

In one embodiment, signal propagation is between the neutral conductor and/or the "earth" conductor of the network and electrical earth.

25

- Preferably, at least part of the network is external to a building and the signal is transmissible along the external part of the network. Preferably, the network connects a plurality of separate buildings and said signal  
30 is transmissible between said buildings.

- Preferably, the carrier frequency of the signals is above approximately 1MHz. The carrier frequency may in fact be less than 1MHz ie. 800KHz or even as low as 600KHz, but as  
35 it is reduced so is the usable bandwidth.

A plurality of telecommunications signals may be provided,

each having different carrier frequencies. The term "carrier frequency" refers to the unmodulated frequency of the carrier signal, and not to the frequency of the telecommunications signal once modulated.

5

On, for example, a 400V network the carrier frequency may preferably be between 1-10MHz, and on, eg., a 11kV network may be between e.g. 1-20MHz, or possibly 5-60MHz. However the frequency may be up to 100's of MHz depending on the  
 10 network and the application. For example, over short distances (10-20m) a frequency range of e.g. 1-600MHz or 1-800MHz may be used.

The power network may include one or more phases.

15 Preferably the network is a polyphase network including e.g. any one or more of 2, 3, 4, 5, 6, 7 etc phases. Different sections of the network may include different numbers of phases.

20 The network may typically be a trunk and branch multipoint (or point to multipoint) electricity distribution and/or power transmission network. In some instances a plurality of trunk and branch networks may be joined e.g. to form a ring.

25

Preferably the network is balanced i.e. provides balanced transmission characteristics. The network may also be unbalanced or a combination of both. The network may be an "overhead" network i.e. the cable(s) of the network may  
 30 lie above ground e.g. flown or strung between pylons, or may be substantially underground. The network may also e.g. be underground or underwater.

Preferably at least part (or all) of the transmission  
 35 network is external to any building or premises such as an office or house and the signal(s) is/are transmissible

along said external part. Inside such buildings, transmission distances are typically short and therefore attenuation losses relatively unimportant.

- 5 Preferably the power network is a major (e.g. overground) power network including e.g. any or all of 132kV, 33kV, 11kV, 415V and 240V sections. The telecommunications signals may be transmitted over any or all of the sections of the power network by suitable detection, amplification and/or regeneration and reintroduction as and when  
10 necessary.

In order to overcome the problem of coupling HF communications signals across transformers at various  
15 voltage levels a HF by-pass unit is preferably provided which can either provide for balanced to balanced or balanced to unbalanced by-pass in either direction, i.e. primary to secondary or secondary to primary sides of the power transformer.

20

The by-pass unit may utilise any or all of: fuse protection, capacitive coupling, dust iron or ferrite transformer impedance matching and balanced or unbalanced termination capability. The frequency response of the  
25 ferrite materials at 50 to 60 Hz is negligible and by suitable centre tapping of the primary and/or secondary windings together with adequate insulation of the core materials good flashover protection may be provided.

- 30 It should be noted that by utilising HF communications signals above 1 MHz together with inductor core materials such as dust iron and ferrite, it becomes possible to fabricate and high impedance inductive elements which are sufficiently small in physical size to be retro fitted to  
35 existing OH EDN support structures and in many cases may simply replace existing jumper wires.

According to a further aspect, the present invention provides a method of signal transmission including input of a telecommunications signal onto an earth or neutral conductor of an electricity distribution and/or power transmission network, and subsequent reception of the signal.

Embodiments of the present invention will now be described with reference to the accompanying drawings in which:

10

Figure 1a is a side view of a sample of one of the types of power cable with which the present invention may be used;

15 

Figure 1b is an end view of the cable of figure 1a;

Figure 2 is a schematic diagram showing an embodiment of the present invention;

20 

Figure 3 is a schematic diagram of the transformer bypass of figure 2;

Figure 4a is a side view of a second cable with which the present invention may be used;

25

Figure 4b is an end view of the cable of figure 4a.

Figures 1a and 1b illustrate a sample of power cable which has a central conductor (10) - although polyphase conductors may be provided - composed of a number of twisted aluminium conductors and which is insulated by a sheath of XLPE (12) material from a further sheath of the (eg. copper) neutral earth conductors (13). The whole cable is encased in a further outer sheath (14). Each of these conductors (13) is equally spaced about the outer circumference of the cable. It follows that if we

consider each of these conductors as an isolated pair we have a means to carry power line telecommunications (PLT) signals along the length of the power cable. However, the 'pairs' chosen to carry PLT signals may also be required  
5 to carry 60 Hz neutral and/or earth current.

In order to be utilised for PLT signals, the neutral/earth conductors (13) need to be isolated (as far as the high frequency communication signals are concerned) from earth  
10 potential. This is done by placing an inductor between each conductor (13) being used and the earth connection. The inductor (not shown but similar to the set up in figure 4) may be a separate component or alternatively may be formed by placing a ferrite or ferromagnetic sheath  
15 substantially around a part of the conductor (13).

Figure 2 illustrates a method of permitting the cable of figure 1a to be utilised in a dual mode; that is to carry both electrical energy between the inner core and the  
20 outer sheath conductors and to further carry PLT signals between two or more of the outer sheath conductors. An EDN, single phase, power transformer (20) has a primary, high voltage, winding (21) which is fed by high voltage via a high voltage feeder cable (22), plug/socket  
25 connector (23) and a high voltage fuse link (24) which is usually fitted inside the transformer unit.

The transformer split secondary winding (25) is centre tapped and is connected to the low voltage secondary  
30 distribution cables via a terminal unit (26). In North America the secondary centre tap (27) is normally earthed at the transformer providing two 120 volts, 60 Hz, potential about earth (ie. 120 volts-0-120 volts).

35 The transformer windings, core and fuse links are normally contained in a steel tank (28) that is oil-filled and

bonded to earth. In order to provide an efficient coupling path for PLT signals, frequency selective filtering, balancing (balanced to unbalanced, unbalanced to balanced etc) and isolation devices may be required.

- 5 These devices are housed in terminal units (28) and (29) and interconnected via a balanced or unbalanced coupling link (30).

Figure 3 illustrates the filtering options with balanced  
 10 to unbalanced conversion as desired. The Primary Terminal unit (PTU) (28) contains a low-pass filter, a balun and a high-pass filter. The low-pass filter (31) connects to two, or more of the outer cable conductors (13) and to the high-pass filter (32), which interconnects via a suitable  
 15 balun onto the coaxial interconnector (30). The low-pass filter (31) also connects to the, 60 Hz, earth rail thus permitting the neutral currents in the power cable sheath conductors to remain at or about earth potential whilst maintaining a high impedance at the PLT signalling  
 20 frequencies of interest.

The coaxial interconnector (30) terminates in a balun and high-pass filter unit (33) at the Secondary Terminal Unit (STU) (29). This enables the PLT signals to pass to and  
 25 from the unbalanced coaxial interconnector to the, balanced, secondary supply cables (34, 35) about earth (27) and to be conducted together with the low voltage, 60 Hz, mains supply to and from the customer premises PLT equipment.

30

The low-pass filter unit (36) enables the 60 Hz power components to pass from the transformer secondary winding (25) to the low voltage distribution cable connections (34, 27, 35) whilst providing a high impedance to the PLT  
 35 signal frequencies present at (34) and (35) about earth (27). The low-pass filter unit (36) may be omitted and is

dependent upon the acceptable loading (reactance) of the transformer secondary winding at the PLT signal frequencies.

- 5 Whilst the embodiment as described above illustrates, balanced, PLT signal transmission on a pair of, adjacent, conductors on the outer cable sheath any combination of conductors might be utilised. For example, one conductor might be fed in an unbalanced mode against the remaining  
10 9. Alternatively, 2 against 8, or 5 against 5 in the balanced mode if appropriate. It should be remembered that some power cables utilise a semi-conductive coating around the outer sheath conductors, see Figure 1, 5 and this may necessitate specific configurations or bunching  
15 of the sheath conductors to optimise efficiency at the PLT signal frequencies.

This invention is also applicable to power cables where all or some of the sheath conductors may be separately  
20 insulated, including situations where steel wire armour (SWA), metal conduit and/or adjacent metal pipework might be utilised as a PLT signal conductor or as part of a PLT signal path.

- 25 Such a power cable is illustrated in Figure 4a and 4b. The cable (40) has a SWA outer sleeve (41) followed by a sleeve of insulation (42) followed by a further sleeve of neutral conductors (43) followed by further insulation (44), separately formed around each of three phase  
30 conductors (45). Both the SWA sleeve and the neutral conductors are usually to be earthed eg. via earthing clamps (46) and (47) and their associated earth conductors (8).

- 35 By providing a ferrite sleeve (48) on one or both of the earth conductors, or by placing an inductor in series with

the earth connection(s), we can provide a degree of frequency selective isolation (series inductive reactance) before the common earth point, thus permitting the PLT signal to be fed over the power cable, between the outer  
5 SWA sheath (47) and the inner neutral sheath (48). The PLT signal may be fed in either the unbalanced or balanced mode. In the unbalanced mode, the outer conductor sheath of the PLT signal coaxial cable (49) may be coupled to the power cable SWA via earth clip (46) and the inner coaxial  
10 conductor (50) may be coupled onto the neutral conductors of the power cable via earth clamp (46).

The reactance of the ferrite sleeve (48) is minimal at power frequencies (ie. 50/60Hz) and will therefore have  
15 minimal impact on any neutral and/or earth currents at these frequencies. The reactance of the ferrite sleeve is designed to be greater than the characteristic impedance of the power/coaxial cables at the lowest PLT signal frequency and thereby provides a relatively high impedance  
20 path to earth at this and higher frequencies (ie. inductive reactance is directly proportional to frequency). Preferably the conductor can carry suitable fault current according to the network design.

25 As a result, an efficient PLT signal coupling arrangement is provided between the telecommunication coaxial cable and the power cable neutral and earth conductors, over the required PLT frequency band. The higher the PLT signal frequency band the more easily this might be achieved. A  
30 balun(s) and/or impedance transformer(s) might also be utilised should there be considerable impedance miss-match between the telecommunication and power cable components.

Similarly, if two ferrite sleeves are introduced, one for  
35 each earth conductor, the PLT signals may be introduced in the balanced mode (eg. via a twisted pair



telecommunications cable) and this might, in some  
circumstances (unsheathed multi-conductor power cable with  
separate neutral earth conductors), reduce the level of  
radiated emissions from the cable(s). For ease of  
5 fitting, the ferrite sleeve(s) might be split and clamped  
over the earth cable(s), this might also reduce fitting  
time and minimise the overall cost of deployment.

The above embodiments of the present invention have been  
10 described by way of example only and various alternative  
features or modifications from what has been specifically  
described and illustrated can be made within the scope of  
the invention, as will be readily apparent to a person  
skilled in the art.

15

CLAIMS

- 5 1. An electricity distribution and/or power transmission network, the network including input means for the input of a telecommunications signal onto an earth or neutral conductor of the network and output means for removing said telecommunications signal from the network.
- 10 2. A network according to claim 1 wherein said neutral or earth conductor is substantially isolated from the electrical earth at frequencies to be used by the telecommunications signal.
- 15 3. A network according to claim 2 wherein the high frequency isolation is achieved by a suitable inductor being electrically connected at relevant frequencies between the conductor and electrical earth.
- 20 4. A network according to claim 3 wherein at least part of the inductor consists of a ferrite or ferromagnetic sleeve located substantially around a part of the conductor.
- 25 5. A network according to claim 3 or 4 wherein the inductor can continuously conduct at least a 10A current at power frequency.
- 30 6. A network according any one of the above claims including a transformer for connecting first and second portions of the network, and including bypass means for removing the signal from the conductor in the first
- 35 portion of the network and inputting the signal onto any conductor (phase, earth or neutral) of the second portion of the network.

7. A network accordingly to any of the above claims wherein signal propagation is between the neutral conductor of the network and electrical earth.

5 8. A network according to any of the above claims wherein at least part of the network is external to a building and the signal is transmissible along the external part of the network.

10

9. A network according to any of the above claims wherein the network connects a plurality of separate buildings and said signal is transmissible between said buildings.

15

10. A network according to any of the above claims wherein the network is a trunk and branch multipoint electricity distribution and/or power transmission network.

20

11. A network accordingly to any of the above claims wherein the signal has a carrier frequency greater than approximately 1 MHZ.

25 12. A method of signal transmission including input of a telecommunications signal onto an earth or neutral conductor of an electricity distribution and/or power transmission network, and subsequent reception of the signal.

30

13. A method according to claim 12 wherein said neutral or earth conductor is substantially isolated from the electrical earth at frequencies to be used by the telecommunications signal.

35

14. A method according to claim 13 wherein the high frequency isolation is achieved by a suitable inductor being electrically connected at relevant frequencies

between the conductor and electrical earth.

15. A method according to claim 14 wherein at least part of the inductor consists of a ferrite or ferromagnetic sleeve located substantially around a part of the conductor.

16. A method according to claim 14 or 15 wherein the inductor can continuously conduct at least a 10A current at power frequency.

17. A method according to any one claims 12-16 wherein the network includes a transformer for connecting first and second portions of the network, and the method includes bypassing the transformer at communication frequencies by removing the signal from the conductor in the first portion of the network and inputting the signal onto any conductor (phase, earth or neutral) of the second portion of the network.

18. A method according to any of claims 12-17 wherein signal propagation is between a neutral conductor of the network and electrical earth.

19. A method according to any of claims 12-18 wherein at least part of the network is external to a building and the signal is transmitted along the external part of the network.

20. A method according to any of claims 12-19 wherein the network connects a plurality of separate buildings and said signal is transmissible between said buildings.

21. A method according to any of claims 12-20 wherein the network is a trunk and branch multipoint electricity distribution and/or power transmission network.

22. A method according to any of claims 12-21 wherein the

signal has a carrier frequency greater than approximately 1 MHZ.

23. A method substantially as any one embodiment hereby  
5 described with reference to the accompanying drawings.

24. A method of signal transmission substantially as any  
one embodiment hereby described with reference to the  
accompanying drawings.



Application No: GB 9918002.8  
Claims searched: all

16  
Examiner: Martyn Dixon  
Date of search: 19 January 2000

**Patents Act 1977**  
**Search Report under Section 17**

**Databases searched:**

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.R): H4R (RTC,RTR,RTT,RTSR,RTSU)

Int Cl (Ed.7): H04B (3/54,3/56)

Other: Online: EPODOC,WPI,JAPIO

**Documents considered to be relevant:**

Category	Identity of document and relevant passage	Relevant to claims
X	GB 2088175 A (Bligh) the whole document	1,7,12,18
X,P	EP 0889602 A (OBAG) see WPI Abstract Accession No 1999-063038	1-3,11-14, 22
X	EP 0178804 A (STC) see especially figs 2 and 3	1,7-9,12, 18-20
X	EP 0141673 A (Emlux) see especially fig 1	1,7,12,18
X	US 4016429 A (Westinghouse) see especially fig 1 and col 2, lines 9-14	1,7-9,12, 18-20

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.